

Pneumatically Controlled Deluge Valve with Local Reset Model FP 400Y - 4M

The BERMAD model 400Y-4M is an elastomeric, hydraulic line pressure operated deluge valve, designed specifically for advanced fire protection systems, and the latest industry standards.

The 400Y-4M is activated by a pneumatic relay valve which latches the main valve open until locally reset. The optional valve position indicator can include a limit switch ideal for Fire & Gas monitoring systems.

The 400Y-4M is suitable for systems with open nozzles for water or foam discharge.



(for Illustration Only)

Benefits and Features

- **Safety and reliability**
 - Time proven, Simple, fail-safe actuation
 - Single piece, rugged elastomeric diaphragm seal - VRSD technology
 - Obstacle-free, uninterrupted flow path
 - No mechanical moving parts
 - Latches open: remains open until reset locally
- **High performance**
 - Very high flow efficiency
 - Straight through flow Y- type body
 - Approved for PN25 / 365 psi
- **Specifically-designed for fire protection**
 - Face-to-face length standardized to ISO 5752, EN 588-1
 - Suitable for corrosive fluids and freezing temperatures:
 - Pneumatic relay valve
 - Meets the requirements of industry standards
- **Quick and easy maintenance**
 - In-line serviceable
 - Fast and easy cover removal
 - Swivel mounted drain valves*

* not including 1½" & 2" valves

Typical Applications

- Fusible plug loops
- Automatic water spray systems
- Foam applications
- Corrosive water supplies
- Freezing Environments

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 16"



FM Approved
for Deluge Sprinkler Systems
Sizes 1½" - 8"



Det Norske Veritas
Type Approval




ABS
American Bureau of Shipping
Type Approval



Lloyd's Register
Type Approval


Additional Features

- Valve position limit switches
- Local valve position indicator beacon
- Alarm pressure switch
- Sea water compatibility
- Air maintenance device
- Drain valve/s inlet/outlet

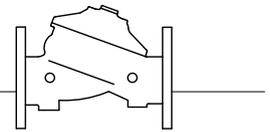


Operation

(for illustrative purposes only)

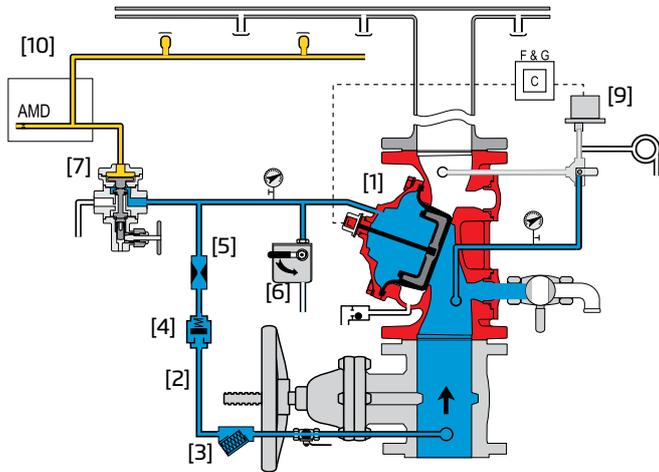

Valve Closed (normal conditions)

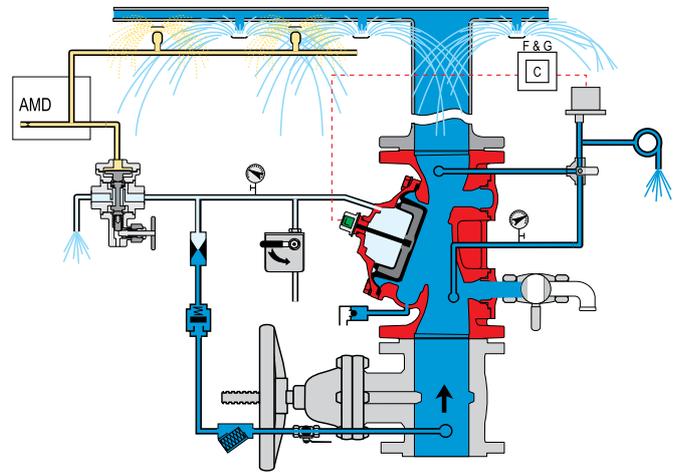


Valve Open (fire conditions)

The BERMAD model 400Y-4M is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] strainer [3] and restriction orifice [5] it is then trapped in the control chamber by a check valve [4], manual emergency release [6], and a relay valve (URV-M) [7] that is held closed by pneumatic pressure in the dry pilot line [10]. The water pressure trapped in the control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber by the URV-M opening automatically in response to a decrease in pneumatic dry pilot-line pressure. This latches the 400Y-4M deluge valve open, allowing water to flow into the system piping and to the alarm device [9].

System P&ID

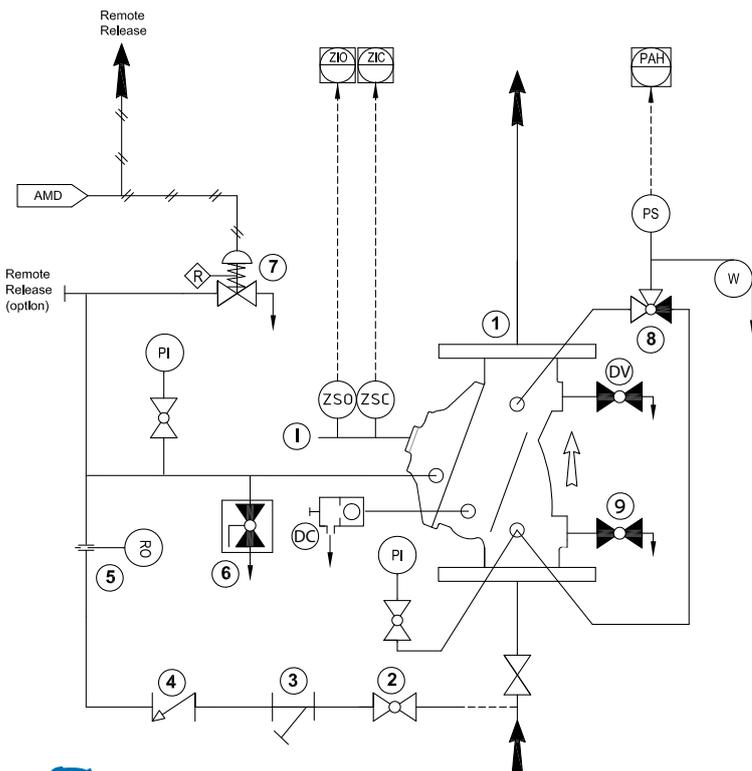

Components

- 1 BERMAD 400Y Deluge Valve
- 2 Priming Ball Valve
- 3 Priming Strainer
- 4 Check Valve
- 5 Restriction Orifice
- 6 Manual Emergency Release
- 7 URV-2-M Relay Valve


Optional System Items

- ZS Limit Switch Assembly
- I Visual Indicator
- DV Additional Drain Valve
- PS Pressure Switch
- AMD Air Maintenance Device
- W Water Motor Alarm
- DC Automatic Drip Check Valve*
- PI Pressure Indicator*
- 8 3-Way Alarm Ball Valve*
- 9 Drain Valve*

See also Factory Fitted Options under the Valve Code Designations on the last page

*Mandatory for FM approval
(suffix A in code designations on page 4)





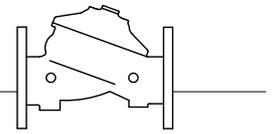

System Installation

A typical installation of the BERMAD model 400Y-4M features automatic actuation via a pneumatic universal relay valve, triggered by a fusible plug loop. When fitted with a limit switch, the valve can send a feedback signal to a remote valve position monitoring system.

Optional System Items

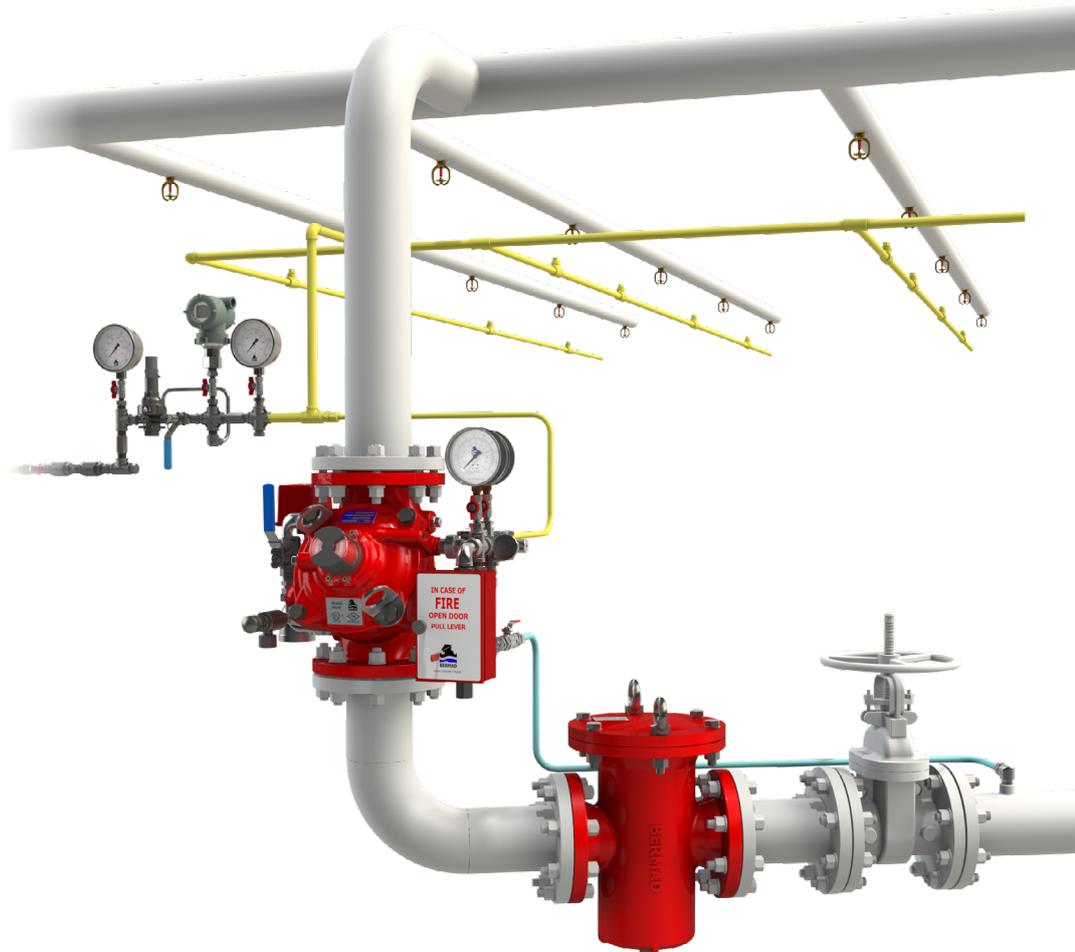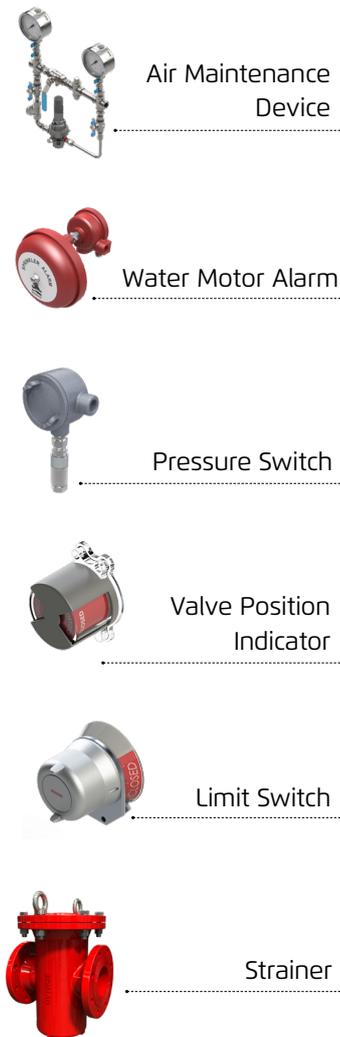

(for Illustration Only)

Suggested Specifications

The deluge valve shall be a UL listed and FM approved, 25 bar/365 psi rated, elastomeric-type, straight-through, Y-type-body valve. The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.


Valve actuation shall be accomplished by a single-piece, rolling diaphragm bonded with a rugged radial seal disk. The diaphragm assembly shall be the only moving part.

The deluge valve shall include a latching relay pilot valve, a Y-type strainer, a ball drain valve, an automatic drip-check with manual override, 4-inch pressure gauges, and a manual emergency release housed in a stainless steel box.

The valve drain socket shall be flanged with a 360-degree swivel capability.

The valve shall be equipped with a protective-covered, dual-color, rotational position indicator, and with two limit switches enclosed in a protective switch box. Removing the valve cover for inspection or maintenance shall be in-line and not require removal of the trim. The deluge valve and its entire control trim shall be supplied pre-assembled and hydraulically tested by a factory certified to ISO 9000 and 9001 standards.

BERMAD Fire Protection



Model FP 400Y - 4M

400Y Series

Technical Data

Available Sizes (inch)



- Flanged - 1½, 2, 3, 4, 6, 8, 10, 12, 14 & 16"
- Grooved - 1½, 2, 3, 4, 6 & 8"
- Threaded - 1½ & 2"

Pressure Rating

- ANSI#150 - 16 bar / 235 psi
- ANSI#300 - 1½" to 10" 25 bar / 365 psi
12" to 16" 20 bar / 300 psi
- Grooved/Threaded - 25 bar / 365 psi

Elastomer

- HTNR - Fabric Reinforced High Temperature Compound - See engineering data

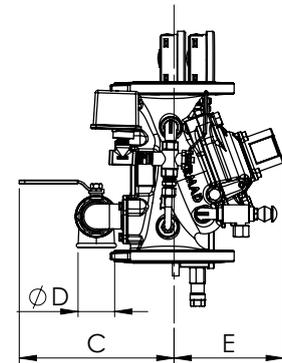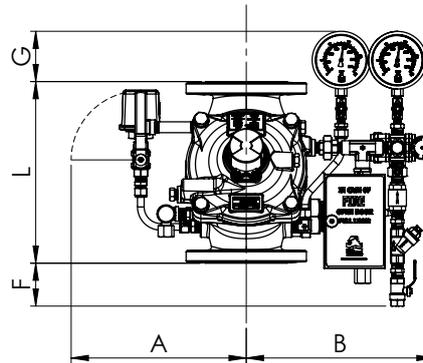

Valve Size	1½" DN40	2" DN50	3" DN80	4" DN100	6" DN150	8" DN200	10" DN250	12" DN300	14" DN350	16" DN400
⁽¹⁾ L ¹ ANSI #150 mm (in.)	230(9.06)	230(9.06)	310(12.21)	350(13.79)	480(18.91)	600(23.64)	730(28.76)	850(33.49)	980(38.61)	1100(43.34)
L ² ANSI #300 mm (in.)	230(9.06)	238(9.37)	326(12.84)	368(14.50)	506(19.94)	626(24.66)	730(28.76)	888(34.96)	980(38.61)	1100(43.34)
A mm (in.)	330(13.0)	330(13.0)	390(15.4)	398(15.7)	451(17.8)	481(18.9)	481(18.9)	594(23.4)	594(23.4)	594(23.4)
B mm (in.)	294(11.6)	294(11.6)	352(13.8)	362(14.2)	417(16.4)	445(17.5)	445(17.5)	558(22)	558(22)	558(22)
C mm (in.)	241(9.5)	241(9.5)	274(10.8)	290(11.4)	304(12.0)	320(12.6)	320(12.6)	383(15.1)	383(15.1)	408(16.1)
ØD	¾"	¾"	1½"	2"	2"	2"	2"	2"	2"	2"
E mm (in.)	167(6.6)	167(6.6)	191(7.5)	205(8.1)	273(10.7)	338(13.3)	338(13.3)	490(19.3)	490(19.3)	465(18.3)
F mm (in.)	184(7.24)	184(7.24)	114(4.5)	87(3.4)	5.5(0.2)	-	-	-	-	-
G mm (in.)	121(4.76)	121(4.76)	111(4.4)	98(3.86)	49.5(1.94)	25(1)	-	-	-	-
KV m ³ /h (Cv gpm)	68(79)	80(92)	190(219)	345(398)	790(912)	1160(1340)	1355(1565)	2370(2737)	2850(3292)	3254(3758)
⁽²⁾ Leq m (ft)	2(7)	5(16)	7(23)	9(30)	15(49)	27(89)	62(203)	52(171)	59(194)	88(289)
Weight, flanged kg (lbs)	15.1(33.2)	16.2(35.6)	29.9(65.8)	39.9(87.8)	84.2(85.2)	147.4(29.5)	177.4(390.3)	320.5(704.5)	353.3(776.6)	399.3(878.5)

Notes: ⁽¹⁾ L¹ Dimensions are for grooved, threaded and raised face flanged valves

⁽²⁾ Leq (Equivalent Pipe Length) refers to turbulent flow in new steel pipe schedule 40, values given for general consideration only

⁽³⁾ Dimensions for the trim envelope may vary with specific component positioning

Valve Code Designations

FP	6"	400Y-4M	H	C	A5	PR	NN	PRS																																																																																																																					
<table border="1"> <thead> <tr> <th>Category</th> <th>code</th> </tr> </thead> <tbody> <tr> <td>Standard</td> <td>FP</td> </tr> <tr> <td>Seawater</td> <td>FS</td> </tr> <tr> <td>Foam Concentrate</td> <td>FC</td> </tr> </tbody> </table>	Category	code	Standard	FP	Seawater	FS	Foam Concentrate	FC	<table border="1"> <thead> <tr> <th>Valve Size</th> <th>code</th> </tr> </thead> <tbody> <tr> <td>1½"</td> <td>40 mm</td> </tr> <tr> <td>2"</td> <td>50 mm</td> </tr> <tr> <td>3"</td> <td>80 mm</td> </tr> <tr> <td>4"</td> <td>100 mm</td> </tr> <tr> <td>6"</td> <td>150 mm</td> </tr> <tr> <td>8"</td> <td>200 mm</td> </tr> <tr> <td>10"</td> <td>250 mm</td> </tr> <tr> <td>12"</td> <td>300 mm</td> </tr> <tr> <td>14"</td> <td>350 mm</td> </tr> <tr> <td>16"</td> <td>400 mm</td> </tr> </tbody> </table>	Valve Size	code	1½"	40 mm	2"	50 mm	3"	80 mm	4"	100 mm	6"	150 mm	8"	200 mm	10"	250 mm	12"	300 mm	14"	350 mm	16"	400 mm	<table border="1"> <thead> <tr> <th>Installation</th> <th>code</th> </tr> </thead> <tbody> <tr> <td>Horizontal</td> <td>H</td> </tr> <tr> <td>Vertical</td> <td>V</td> </tr> </tbody> </table>	Installation	code	Horizontal	H	Vertical	V	<table border="1"> <thead> <tr> <th>Coating</th> <th>code</th> </tr> </thead> <tbody> <tr> <td>Polyester Red</td> <td>PR</td> </tr> <tr> <td>High Build Epoxy</td> <td>ER</td> </tr> <tr> <td>Uncoated</td> <td>UC</td> </tr> </tbody> </table>	Coating	code	Polyester Red	PR	High Build Epoxy	ER	Uncoated	UC	<table border="1"> <thead> <tr> <th>Tubing & Fittings</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Stainless Steel 306</td> <td>NN</td> </tr> <tr> <td>Monel</td> <td>MM</td> </tr> <tr> <td>Super Duplex</td> <td>DD</td> </tr> </tbody> </table>	Tubing & Fittings	Code	Stainless Steel 306	NN	Monel	MM	Super Duplex	DD	<table border="1"> <thead> <tr> <th>Material Body & Cover ⁽¹⁾</th> <th>code</th> </tr> </thead> <tbody> <tr> <td>Ductile Iron A356 ⁽²⁾</td> <td>C</td> </tr> <tr> <td>Steel ASTM A216 WCB ⁽²⁾</td> <td>S</td> </tr> <tr> <td>Stainless Steel 316</td> <td>N</td> </tr> <tr> <td>Nickel Al Bronze C95800</td> <td>U</td> </tr> <tr> <td>Super Duplex Grade 5A</td> <td>D</td> </tr> </tbody> </table>	Material Body & Cover ⁽¹⁾	code	Ductile Iron A356 ⁽²⁾	C	Steel ASTM A216 WCB ⁽²⁾	S	Stainless Steel 316	N	Nickel Al Bronze C95800	U	Super Duplex Grade 5A	D	<table border="1"> <thead> <tr> <th>Factory Fitted Options</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>General Purpose NEMA-4 Pressure Switch ⁽³⁾</td> <td>P</td> </tr> <tr> <td>Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾</td> <td>P7</td> </tr> <tr> <td>Ex d ATEX Pressure Switch ⁽³⁾</td> <td>P9</td> </tr> <tr> <td>Single Limit Switch, General Purpose</td> <td>RS</td> </tr> <tr> <td>Single Ex d Proximity Limit Switch</td> <td>RS9</td> </tr> <tr> <td>Double Ex d Proximity Limit Switch</td> <td>RSS9</td> </tr> <tr> <td>Pressure Gauge Assembly ⁽³⁾</td> <td>6</td> </tr> <tr> <td>S.S Glycerin Pressure Gauge Assembly ⁽³⁾</td> <td>6n</td> </tr> <tr> <td>Monel Pressure Gauge Assembly ⁽³⁾</td> <td>6m</td> </tr> <tr> <td>Downstream Drain Valve</td> <td>DV</td> </tr> <tr> <td>Water Motor Alarm Assembly ⁽³⁾</td> <td>W</td> </tr> <tr> <td>Special Elastomer EPDM</td> <td>E1</td> </tr> <tr> <td>Special Elastomer NBR</td> <td>E3</td> </tr> <tr> <td>Large Control Filter</td> <td>F</td> </tr> <tr> <td>Valve Position Indicator</td> <td>RI</td> </tr> <tr> <td>S.S 316 Trim Accessories</td> <td>N</td> </tr> <tr> <td>316 Stainless Steel Seat</td> <td>T</td> </tr> <tr> <td>Pressure Transmitter ⁽³⁾</td> <td>Q</td> </tr> <tr> <td>Drain and Indicating Components ⁽⁴⁾</td> <td>A</td> </tr> </tbody> </table>	Factory Fitted Options	Code	General Purpose NEMA-4 Pressure Switch ⁽³⁾	P	Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7	Ex d ATEX Pressure Switch ⁽³⁾	P9	Single Limit Switch, General Purpose	RS	Single Ex d Proximity Limit Switch	RS9	Double Ex d Proximity Limit Switch	RSS9	Pressure Gauge Assembly ⁽³⁾	6	S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n	Monel Pressure Gauge Assembly ⁽³⁾	6m	Downstream Drain Valve	DV	Water Motor Alarm Assembly ⁽³⁾	W	Special Elastomer EPDM	E1	Special Elastomer NBR	E3	Large Control Filter	F	Valve Position Indicator	RI	S.S 316 Trim Accessories	N	316 Stainless Steel Seat	T	Pressure Transmitter ⁽³⁾	Q	Drain and Indicating Components ⁽⁴⁾	A	<table border="1"> <thead> <tr> <th>End Connections</th> <th>code</th> </tr> </thead> <tbody> <tr> <td>ANSI#150RF</td> <td>A5</td> </tr> <tr> <td>ANSI#150FF</td> <td>a5</td> </tr> <tr> <td>ANSI#300RF</td> <td>A3</td> </tr> <tr> <td>ISO PN16</td> <td>16</td> </tr> <tr> <td>ISO PN25</td> <td>25</td> </tr> <tr> <td>Grooved ANSI C606</td> <td>VI</td> </tr> </tbody> </table>	End Connections	code	ANSI#150RF	A5	ANSI#150FF	a5	ANSI#300RF	A3	ISO PN16	16	ISO PN25	25	Grooved ANSI C606	VI
Category	code																																																																																																																												
Standard	FP																																																																																																																												
Seawater	FS																																																																																																																												
Foam Concentrate	FC																																																																																																																												
Valve Size	code																																																																																																																												
1½"	40 mm																																																																																																																												
2"	50 mm																																																																																																																												
3"	80 mm																																																																																																																												
4"	100 mm																																																																																																																												
6"	150 mm																																																																																																																												
8"	200 mm																																																																																																																												
10"	250 mm																																																																																																																												
12"	300 mm																																																																																																																												
14"	350 mm																																																																																																																												
16"	400 mm																																																																																																																												
Installation	code																																																																																																																												
Horizontal	H																																																																																																																												
Vertical	V																																																																																																																												
Coating	code																																																																																																																												
Polyester Red	PR																																																																																																																												
High Build Epoxy	ER																																																																																																																												
Uncoated	UC																																																																																																																												
Tubing & Fittings	Code																																																																																																																												
Stainless Steel 306	NN																																																																																																																												
Monel	MM																																																																																																																												
Super Duplex	DD																																																																																																																												
Material Body & Cover ⁽¹⁾	code																																																																																																																												
Ductile Iron A356 ⁽²⁾	C																																																																																																																												
Steel ASTM A216 WCB ⁽²⁾	S																																																																																																																												
Stainless Steel 316	N																																																																																																																												
Nickel Al Bronze C95800	U																																																																																																																												
Super Duplex Grade 5A	D																																																																																																																												
Factory Fitted Options	Code																																																																																																																												
General Purpose NEMA-4 Pressure Switch ⁽³⁾	P																																																																																																																												
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7																																																																																																																												
Ex d ATEX Pressure Switch ⁽³⁾	P9																																																																																																																												
Single Limit Switch, General Purpose	RS																																																																																																																												
Single Ex d Proximity Limit Switch	RS9																																																																																																																												
Double Ex d Proximity Limit Switch	RSS9																																																																																																																												
Pressure Gauge Assembly ⁽³⁾	6																																																																																																																												
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n																																																																																																																												
Monel Pressure Gauge Assembly ⁽³⁾	6m																																																																																																																												
Downstream Drain Valve	DV																																																																																																																												
Water Motor Alarm Assembly ⁽³⁾	W																																																																																																																												
Special Elastomer EPDM	E1																																																																																																																												
Special Elastomer NBR	E3																																																																																																																												
Large Control Filter	F																																																																																																																												
Valve Position Indicator	RI																																																																																																																												
S.S 316 Trim Accessories	N																																																																																																																												
316 Stainless Steel Seat	T																																																																																																																												
Pressure Transmitter ⁽³⁾	Q																																																																																																																												
Drain and Indicating Components ⁽⁴⁾	A																																																																																																																												
End Connections	code																																																																																																																												
ANSI#150RF	A5																																																																																																																												
ANSI#150FF	a5																																																																																																																												
ANSI#300RF	A3																																																																																																																												
ISO PN16	16																																																																																																																												
ISO PN25	25																																																																																																																												
Grooved ANSI C606	VI																																																																																																																												

Notes:

- ⁽¹⁾ Other materials available see engineering data
- ⁽²⁾ Coated internally and externally
- ⁽³⁾ Supplied loose
- ⁽⁴⁾ Mandatory for FM approved valves



www.bermad.com

© Copyright 2007-2012 Bermad CS Ltd. All Rights Reserved. The information contained in this document is subject to change without notice. BERMAD shall not be liable for any errors contained herein. September 2018